

## Alert\_v18

**This is an EA, so you must put it in the experts folder.**

The following indicators need to be placed in the Indicator folder for the Alert to work.  
These are all in the zip folder.

Ichimoku.ex4  
Laguerre RSI\_mod.ex4 (This is a modified version to make it easier to call from the EA)  
THV4 Coral T@H.ex4  
THV4 Trix called.ex4  
FFCal.ex4 (Used for News events not to trade)  
Heiken Ashi  
THV T3 Trix

AlarmOn	=	TRUE	Activates alarm
ShowAlarms	=	TRUE	Hides all alarms if set to false
ShowInacAlarms	=	FALSE	Shows all alarms if set to true
AlarmSoundOn	=	FALSE	Turns alarm sound on if set to true
AlarmSleep	=	FALSE	Turns alarm sleep mode on
AlarmSMin	=	10	Number of minutes to wait between alarms
SendEmail	=	FALSE	Sends email if true (needs to be set up in MT4)
ShowData	=	TRUE	Shows Data Window on left side of Chart
ShowNews	=	FALSE	Turns on News Box, FFCal.ex4 must be in indicators folder
StartNews	=	60	Time before news to not trade
EndNews	=	30	Time after news to not trade

Note1a="--Screen Capture Settings--"

AlarmScrnCapOn	=	FALSE	Captures gif image of chart at time of alarm in \experts\files
ScreenH	=	1680	Horizontal screen capture resolution
ScreenV	=	1050	Vertical screen capture resolution

Note2a="--M1 Alarm Triggers--"

M1Coral	=	FALSE	Any of the M1 to M1440 are enabled if set to true If "ShowInacAlarms" is set to false only the alarms set to true will be displayed, if set to true all alerts will be displayed so you can see what the other alarms are doing, even if they are not being used. The alarm name will be "ORANGE" if used and will
M1Cloud	=	FALSE	
M1Ftrix	=	FALSE	
M1Strix	=	FALSE	
M1Xtrix	=	FALSE	
Histo	=	FALSE	
TrixNumberOfBars1	=	350	
A_t3_period1	=	20	
B_t3_period_ac1	=	35	
hot1	=	0.7	


Note3a="--M5 Alarm Triggers--"


be "GRAY" if not being used.


M5Coral	=	FALSE
M5Cloud	=	FALSE
M5Ftrix	=	FALSE
M5Strix	=	FALSE
M5Xtrix	=	FALSE
Histo	=	FALSE
TrixNumberOfBars5	=	350
A_t3_period5	=	20
B_t3_period_ac5	=	35
hot5	=	0.7


Note4a="--M15 Alarm Triggers--"


M15Coral	=	FALSE
M15Cloud	=	FALSE
M15Ftrix	=	FALSE
M15Strix	=	FALSE
M15Xtrix	=	FALSE
Histo	=	FALSE
TrixNumberOfBars15	=	350
A_t3_period15	=	20
B_t3_period_ac15	=	35
hot15	=	0.7


M1 Coral: 


M1 Cloud: 


M1 F-trix: 


M1 S-trix: 


M1 X-trix: 





M5 Coral: 


M5 Cloud: 


M5 F-trix: 


M5 S-trix: 


M5 X-trix: 





M15 Coral: 

M15 Cloud: 

M15 F-trix: 

M15 S-trix: 

M15 X-trix: 



Note5a="--M30 Alarm Triggers--"

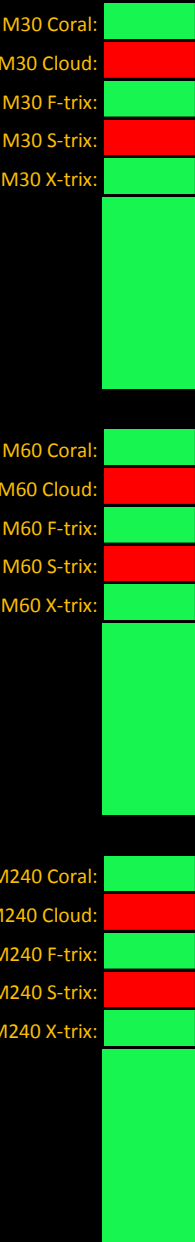
M30Coral	=	FALSE
M30Cloud	=	FALSE
M30Ftrix	=	FALSE
M30Strix	=	FALSE
M30Xtrix	=	FALSE
Histo	=	FALSE
TrixNumberOfBars30	=	350
A_t3_period30	=	20
B_t3_period_ac30	=	35
hot30	=	0.7








Note6a="--M60 Alarm Triggers--"

M60Coral	=	FALSE
M60Cloud	=	FALSE
M60Ftrix	=	FALSE
M60Strix	=	FALSE
M60Xtrix	=	FALSE
Histo	=	FALSE
TrixNumberOfBars60	=	350
A_t3_period60	=	20
B_t3_period_ac60	=	35
hot60	=	0.7

Note7a="--M240 Alarm Triggers--"

M240Coral	=	FALSE
M240Cloud	=	FALSE
M240Ftrix	=	FALSE
M240Strix	=	FALSE
M240Xtrix	=	FALSE
Histo	=	FALSE
TrixNumberOfBars240	=	350
A_t3_period240	=	20
B_t3_period_ac240	=	35
hot240	=	0.7



Note8a="--M1440 Alarm Triggers--"			
M1440Coral	=	FALSE	M1440 Coral: 
M1440Cloud	=	FALSE	M1440 Cloud: 
M1440Ftrix	=	FALSE	M1440 F-trix: 
M1440Strix	=	FALSE	M1440 S-trix: 
M1440Xtrix	=	FALSE	M1440 X-trix: 
Histo	=	FALSE	
TrixNumberOfBars1440	=	350	
A_t3_period1440	=	20	
B_t3_period_ac1440	=	35	
hot1440	=	0.7	
Note9a="--Miss Pips 7 of 11 lights--"			
Note10a="--All other THV set to false--"			
MissPips	=	FALSE	Miss Pips: 
Note11a="--Trend--"			
Note12a="Choose --SMA=0, EMA=1--only"			
Note13a="Choose --SMMA=2, LWMA=3--only"			
Trend	=	FALSE	Trend( xx ): 
TrendShort	=	20	LagRSI(xx): 
TrendShortType	=	1	
TrendMedium	=	60	Stoch(xx): 
TrendMediumType	=	1	
TrendLong	=	200	TDI(xx): 
TrendLongType	=	0	
TimePeriodT	=	15	HA(xx): 
Note14a="--Laguerre_RSI Settings--"			
LagRSIind	=	FALSE	
TimePeriodL	=	15	
Note15a="--Stochastics Settings--"			
Stochastics	=	FALSE	
TimePeriodS	=	15	
StoSMA	=	8	
StoK	=	3	
StoD	=	3	
OffSet	=	0	

<div>Note16a="--5 EMA Envelope Alert--"</div> <div>Note17a="--OffSet is in +/- Pips--"</div>			<p>This alarm is a 5 EMA of the High and Low price which creates a High/Low envelope around the price action. This is normally used on the H1 chart but you also have the option to select the period regardless of the chart period. The alarm will trigger when the High EMA is hit for going SHORT or when the Low EMA is hit for going LONG. The idea is to go SHORT at the top of the envelope and go LONG at the bottom of the envelope. You also have a OffSetHigh and a OffSetLow which will move these trigger points in respect to the 5 EMA High or Low, this movement is in PIPS. So if you want to go 10 pips higher than the EMA just enter 10, if you want to go lower you must enter a -10, you need to have the "-" in front of the number. Don't use "+" for the positive number. You can not change the period or type of this MA, it is always the 5 EMA. The chart period you apply it to can be changed though, but this was originally intended to be use on the H1 chart. This alarm indicator is a little different then the others, when PA is in the center of the envelope you will see a "Wait" indicator as shown above. When the PA gets half way to the 5 MA either top or bottom you will get a red or green light in the first box. When the PA hits the 5 EMA the second box will be red or green. When you go 25% above the envelope the third box will turn red or green. The numbers to the left along with the yellow dashed lines are the envelope.</p>
Envelope	=	FALSE	
TimePeriodE	=	60	
OffsetHigh	=	0	
OffsetLow	=	0	
TDI	=	FALSE	Set to true if you want to use the Traders Dynamic Index as an alarm.
HALogic	=	FALSE	This is the Heiken Ashi 5 SMMA High/Low alarm, it alerts when Close is above or below channel.
TimePeriodTDI	=	15	<p>This sets the period for both the TDI and the HALogic alerts.</p> <p>You can find out more on how these alerts can be used by searching the Net.</p>